

360 °

—
—
—




1		1
3		8
4		11
5		16
6		18
7		20



1

1.1

“ ” “ ” “ ” “ ” “ ”

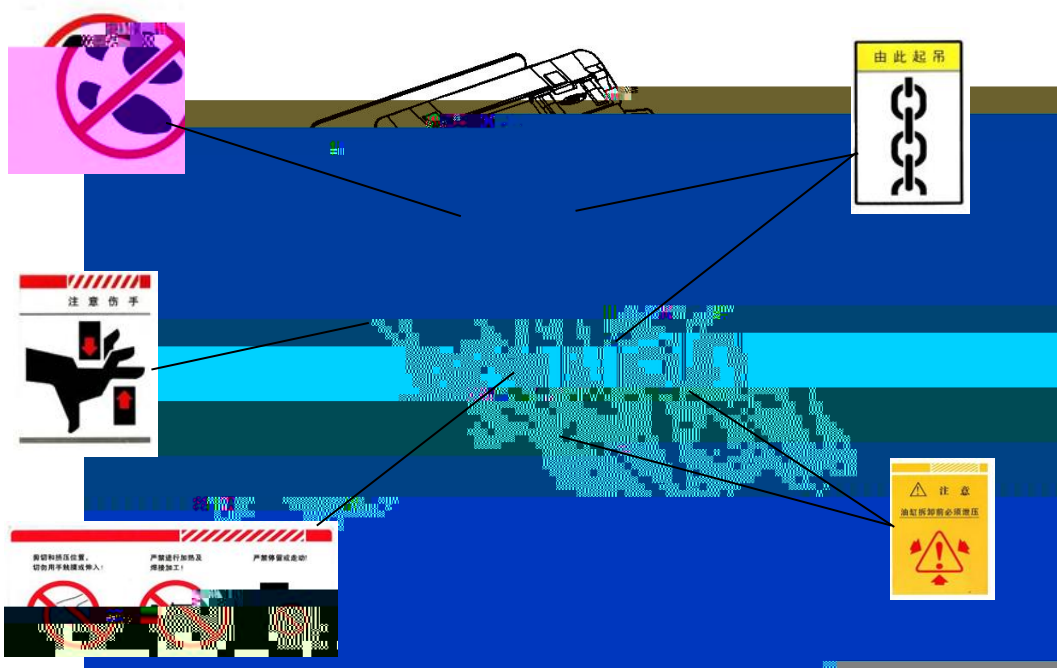



1.2

—

—

—

—

—

-20 ~40

85

2000

1.3

1.3.1

1.3.1.1



1.3.1.2





1.3.2



1.3.3

80

80

1.3.4








ISO4762 ISO4014 ISO4032

	8.8	10.9	12.9
M10	45Nm	66Nm	77Nm
M12	77Nm	115Nm	135Nm
M16	190Nm	280Nm	330Nm
M20	385Nm	550Nm	640Nm


1.4






2

2.1 $\bar{E}$

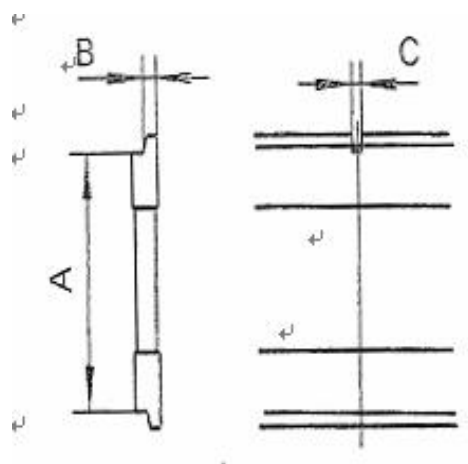


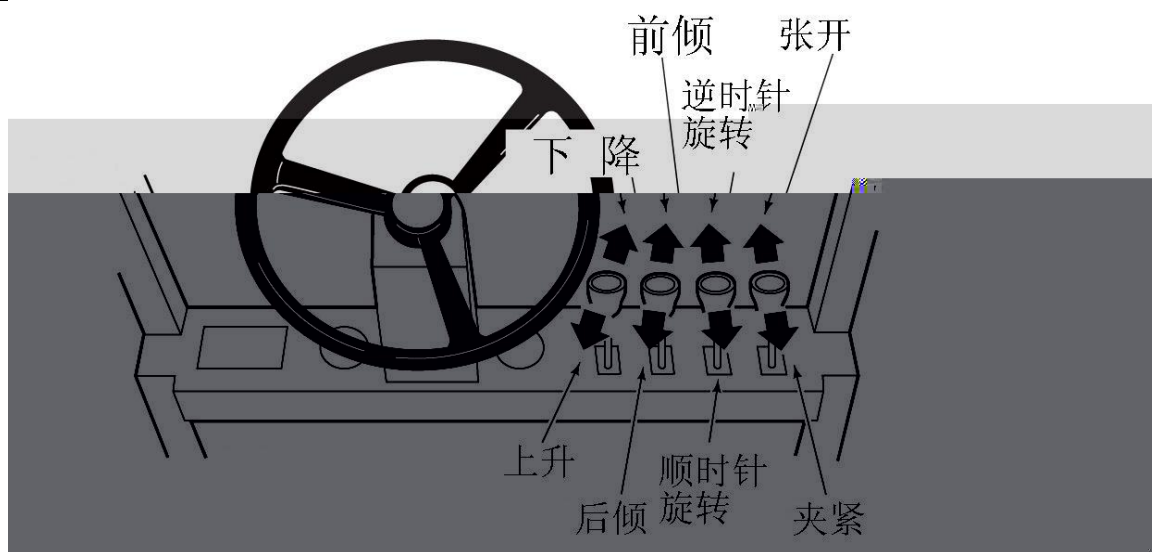

2.4

	Bar		L/min		
ZJ13H ZJ13/12/11/10R	140	160	19	26	38
ZJ22/25/27/33H	140	160	19	38	57
ZJ35/45R/ZJ38/46H	140	160	38	57	76







3


3.1

- 1、拆除包装，将属具吊起，垂直放置与托盘上。
- 2、拆除下钩。

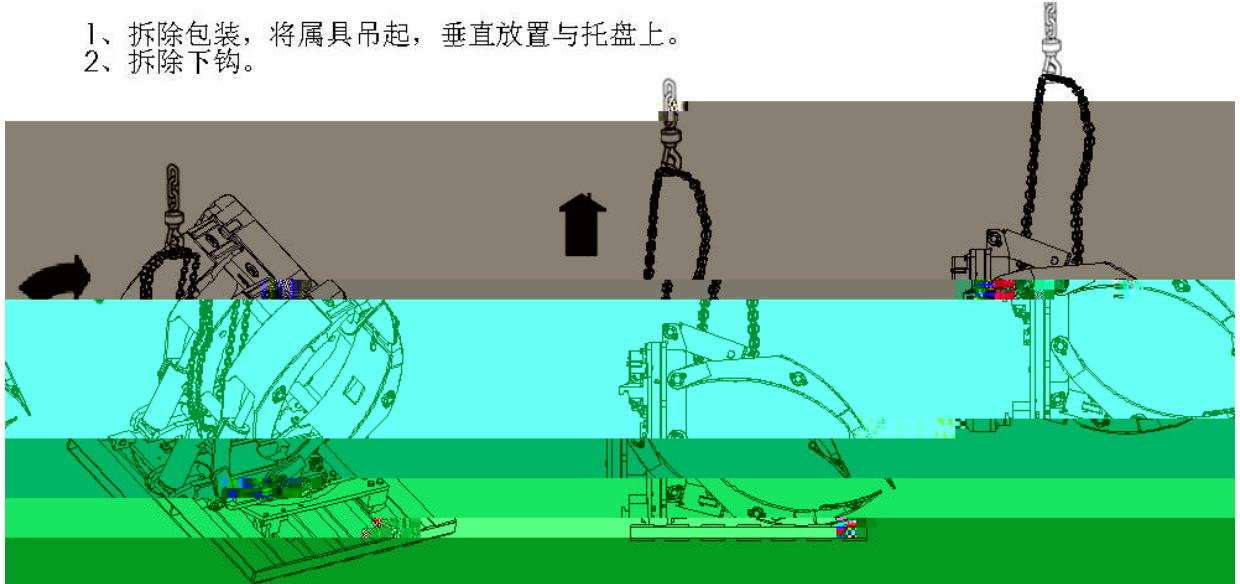

3.2

30

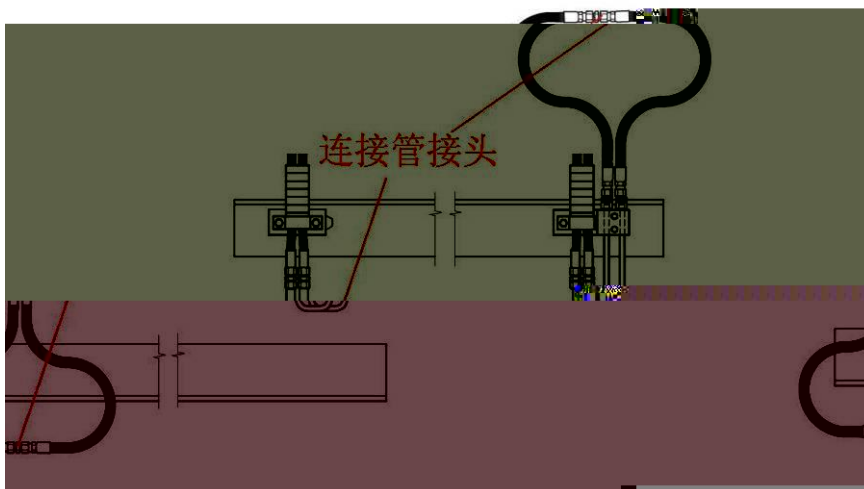

3.3


3.4



5cm

3.5



142 155N.m

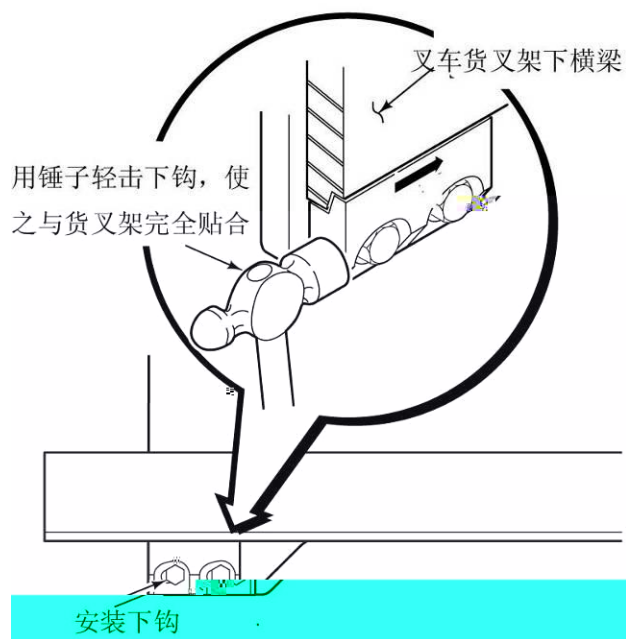


3.6

1.5mm


200

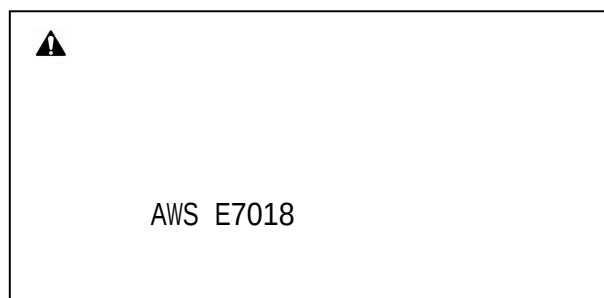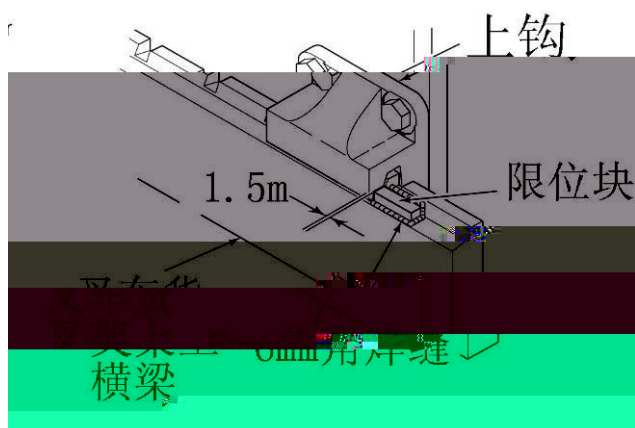



3.7

1




2

-
-
-

45 °

3

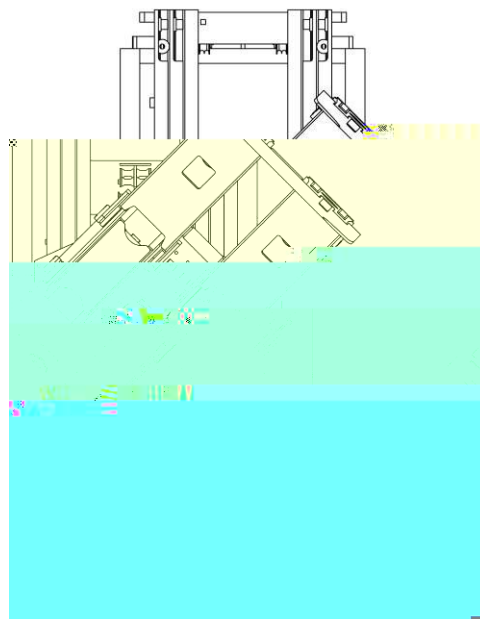

4

3



4

4.1


/

8cm

3~4 °

30cm

4.2




CF@N&A@WE@O@W@B@Q\$N&P

?±\$@N&P@Q\$N&P

4.3

4.3.1

3 V W B l a


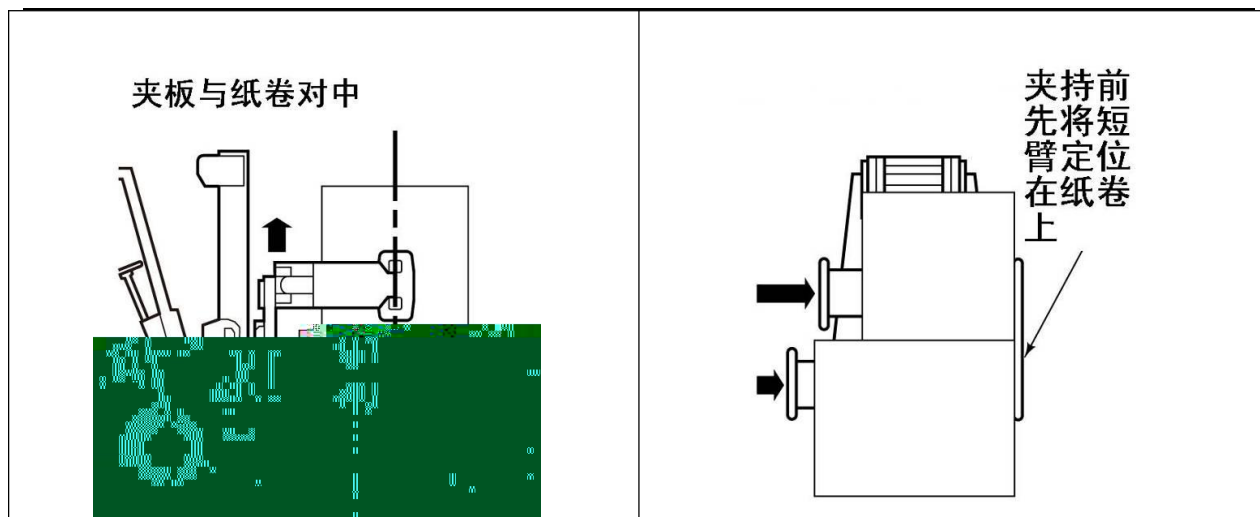


4.4

4.4.1

(1)



2

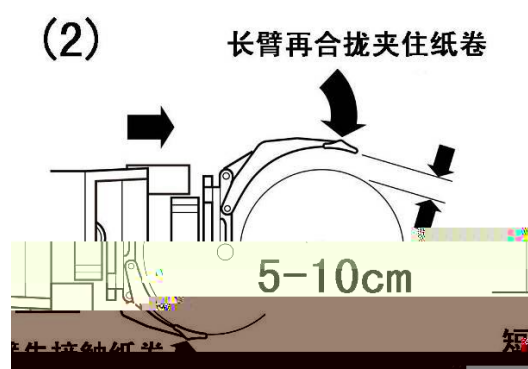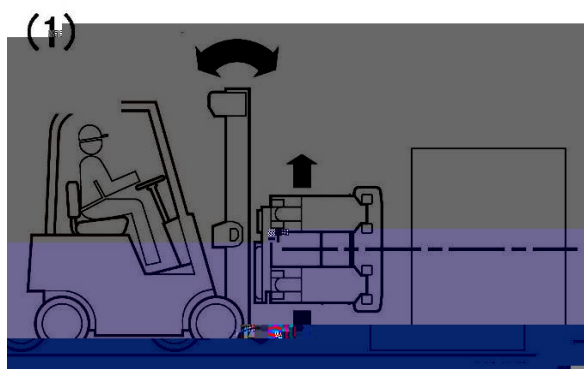



3


4

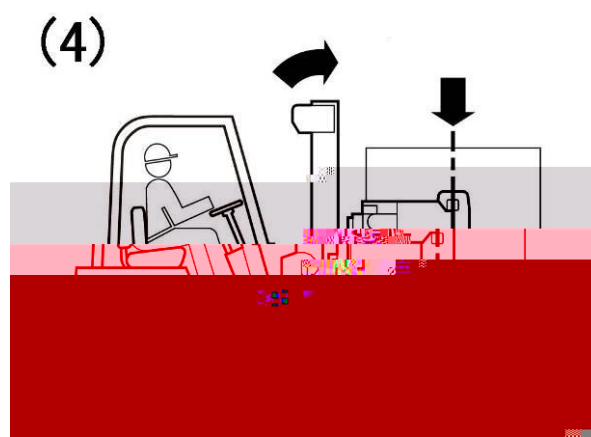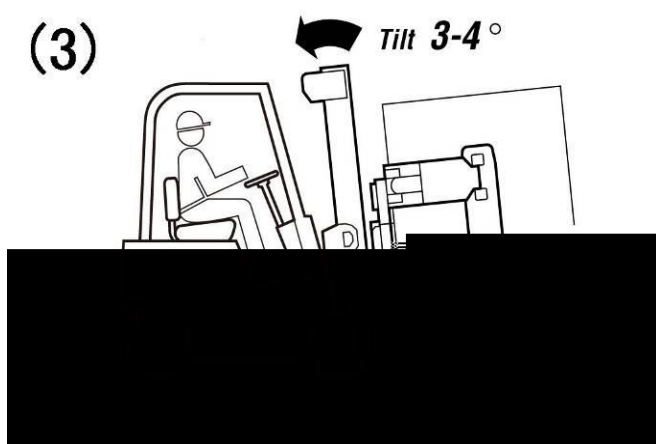

4.4.2



1

2

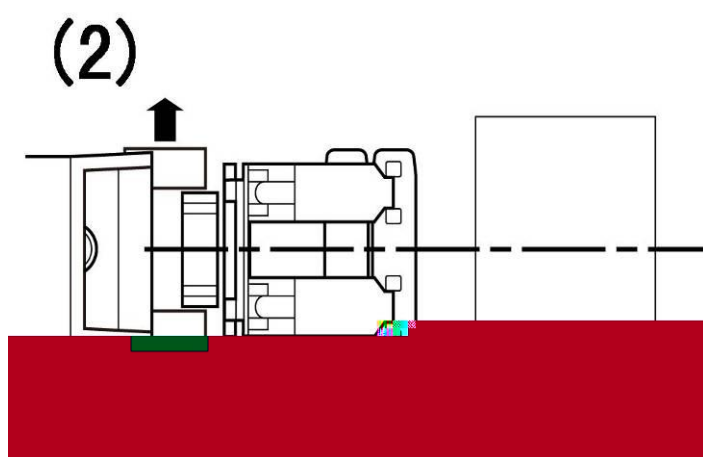

3


4

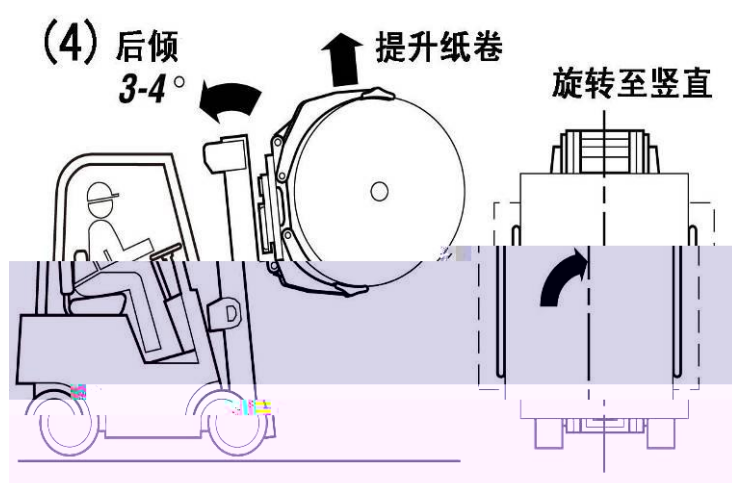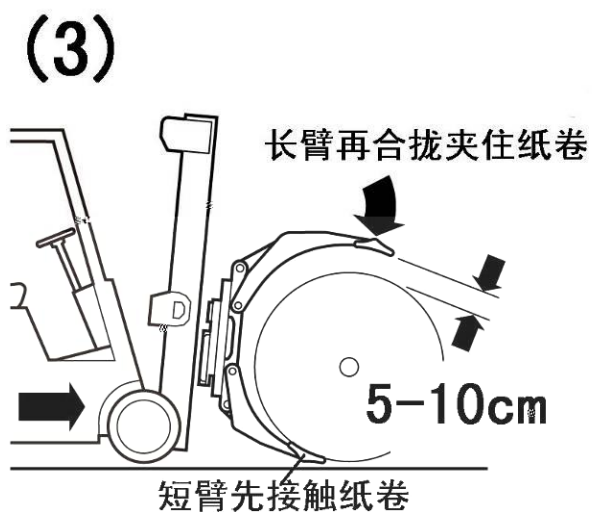



5

(5)

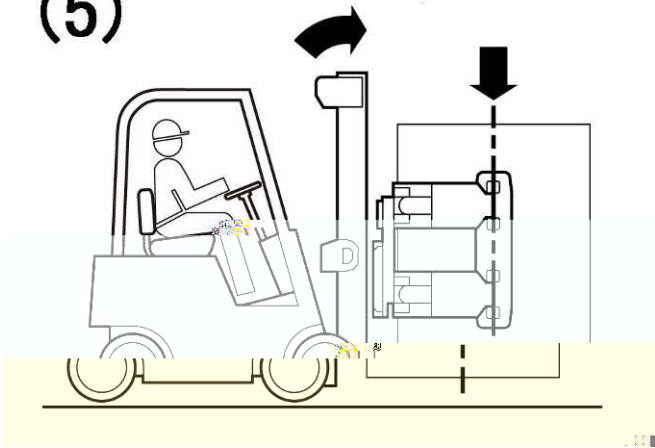



5

5.1 100

100

5.2 500

500

100

140N.m

220N.m

GL-5

SAE-85W/90

5.3 1000


1000

100 500

5.4 2000

2000

100 500 1000



5.5



6

6.1

2.4

6.2

6.3

170bar

6.4

6.5




6.6

6.7

6.8

0.1mm

0.3mm

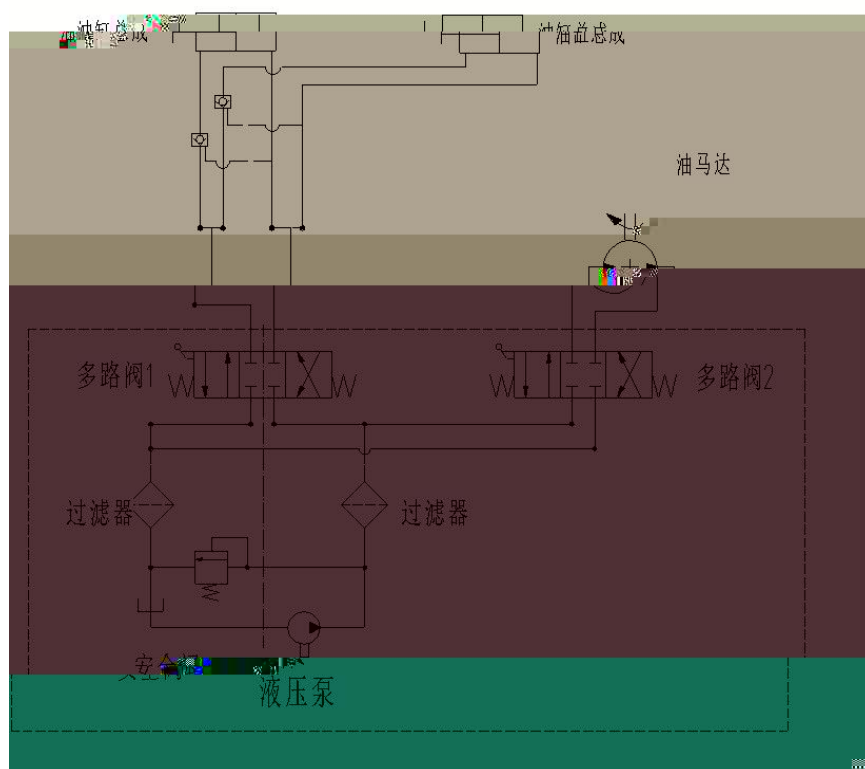



7

“

”

7.1

7.1.1

1

2 4000

12 2000

“ ”

7.2

7.2.1


7.2.2

7.2.3

7.3

7.3.1

7.3.2



7.3.3

7.3.4

7.4

/

0556-5345329/5228123

2025 8 28

.

